



DEPOLLUTION

VEHICLE LIFTS

SEDA IN-GROUND LIFTS

C-527796 / C-527919
C-527911




Electro-hydraulic in-ground vehicle lifts



In-ground lift
Type Swingarm 2.40 (4 t) ▶



In-ground lift
Type Swingarm 4.65 (6,5 t) ▼

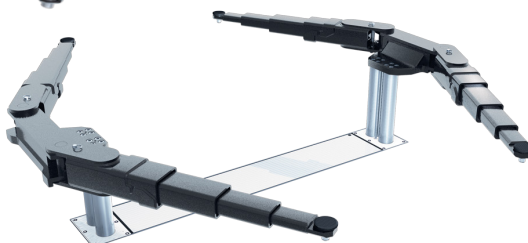

▲ In-ground lift
Type Swingarm 2.35 (3,5 t)

ORDER NUMBER

C-527796 In-ground lift Type
Swingarm 2.35 (3,5 t)

C-527919 In-ground lift Type
Swingarm 2.40 (4 t)

C-527911 In-ground lift Type
Swingarm 4.65 (6,5 t)



TECHNICAL SPECIFICATIONS

	Type Swingarm 2.35	Type Multi arm 2.40	Type Duplex 4.65
Load capacity	3.500 kg	4.000 kg	6.500 kg
Usable lift	2.048 mm	2.033 mm	2.074 mm
Swing in height	95/112 mm	95 mm	150 mm
Cylinder diameter	123 mm	123 mm	123 mm
Ram spacing	2.285 mm	2.530 mm	2.530 mm
Installation depth	2.408 mm	2.408 mm	2.408 mm
Motor power	3 kW	3 kW	3 kW
Electrical connection	400 V / 16 A	400 V / 16 A	400 V / 16 A
Control cable length	11 m	11 m	11 m
Lifting/Lowering time	≈ 35 sec	≈ 35 sec	≈ 35 sec

MORE INFORMATION

- Product video
- More images
- Additional technical specifications
- Online configurator



SEDA-Umwelttechnik GmbH

Schwendter Str. 10 / 6345 Kössen / Tirol / Austria
VAT-ID.: ATU56621622 / FB-Nr.: FN 231790 v / FB-Gericht: Innsbruck
Certified company according to DIN EN ISO 9001

T: +43 5375 6318-0
E: info@seda-international.com
W: www.seda-international.com

