



DEPOLLUTION

VEHICLE LIFTS

SEDA IN-GROUND LIFTS

C-527796 / C-527919
C-527911



Electro-hydraulic in-ground vehicle lifts




In-ground lift
Type Swingarm 2.40 (4 t) ▶

In-ground lift
Type Swingarm 4.65 (6,5 t) ▼



▲ In-ground lift
Type Swingarm 2.35 (3,5 t)

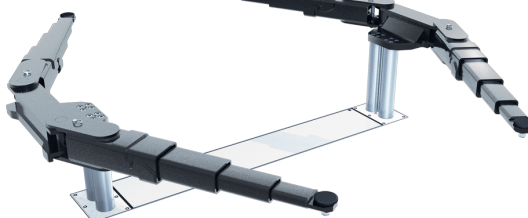

ORDER NUMBER

C-527796 In-ground lift Type
Swingarm 2.35 (3,5 t)

C-527919 In-ground lift Type
Swingarm 2.40 (4 t)

C-527911 In-ground lift Type
Swingarm 4.65 (6,5 t)

TECHNICAL SPECIFICATIONS

	Type Swingarm 2.35	Type Multi arm 2.40	Type Duplex 4.65
Load capacity	7700 lbs	8800 lbs	14330 lbs
Usable lift	80.4"	80"	81.7"
Swing in height	3.74/4.41"	3.74"	5.91"
Cylinder diameter	4.84"	4.84"	4.84"
Ram spacing	89.96"	99.61"	99.61"
Installation depth	94.8"	94.8"	94.8"
Motor power	3 kW	3 kW	3 kW
Electrical connection	400 V / 16 A	400 V / 16 A	400 V / 16 A
Control cable length	36.1 ft	36.1 ft	36.1 ft
Lifting/Lowering time	≈ 35 sec	≈ 35 sec	≈ 35 sec

MORE INFORMATION

- Product video
- More images
- Additional technical specifications
- Online configurator



SEDA Environmental LLC

135 Walter Way,
Fayetteville, GA 30214

T: +1 770 681 0474
E: bruce@seda-usa.com
W: www.seda-usa.com

